


REV.	NOTES	DATE
A	RELEASED	2018/05/25
B	增加系列规格表	2021/04/22

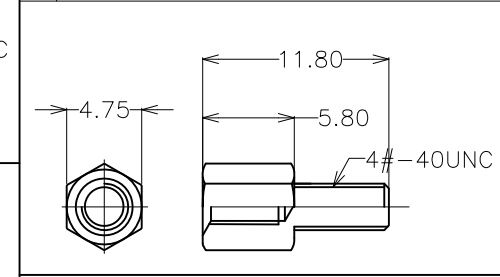

NOTES:

1.MATERIAL



- 1.1 Insulator:PBT+30%Glass Fiber (UL94V-0)
- 1.2 Contact: Brass
- 1.3 Contact: Gold Plated
- 1.4 Shell:Steel Nickel Plated
- 1.5 Screw: Brass ,Nickel Plated

2.SPECIFICATION

- 2.1 Current Rate:3 Amps
- 2.2 Insulator Resistance:1000MΩ Min.
- 2.3 Dielectric Strength:500V AC Per minute
- 2.4 Operation Temperature:-40 °C to+85 °C
- 2.5 Contact Resistance:30mΩ Max

Color description

PART NO.	COLOR
AA03+81X1-098	BLACK
AA03+81X1-698	BLUE

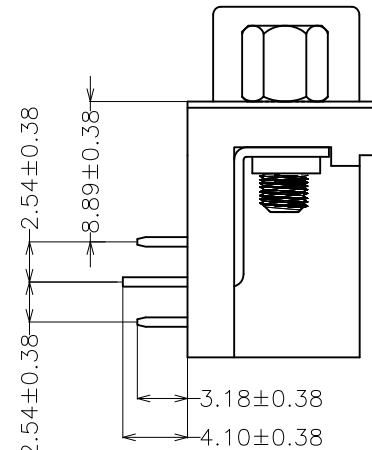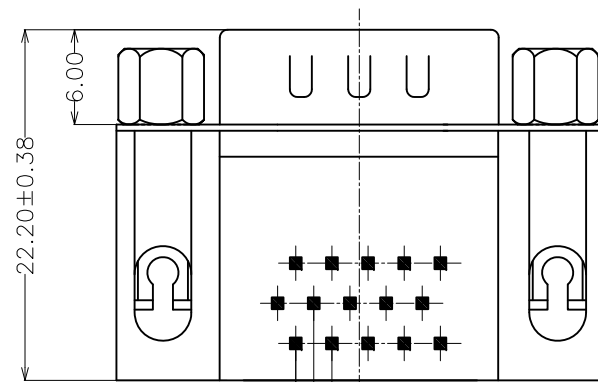

To prepare:

PART NO.	RIVETING STRUCTUER	SCREW	CONTACT PLATING
AA03+8111-X98	铆合不附螺絲		GOLD/TIN PLATED
AA03+8121-X98	铆合鎖螺絲	4.8*11.8	GOLD/TIN PLATED
AA03+8131-X98	叉鎖鎖螺絲	4.8*11.8	GOLD/TIN PLATED
AA03+8141-X98	铆合附螺絲	4.8*11.8	GOLD/TIN PLATED
AA03+8151-X98	铆合附螺絲	5.8*12.8	GOLD/TIN PLATED
AA03+8161-X98	铆合鎖螺絲	5.8*12.8	GOLD/TIN PLATED
AA03+8171-X98	铆合附螺絲	5.8*11.8	GOLD/TIN PLATED
AA03+8181-X98	铆合鎖螺絲	5.8*11.8	GOLD/TIN PLATED

單位(UNITS)	mm
數量(QTY)	N/A
材料(MTL)	SEE NOTE
處理(FINISH)	SEE NOTE

東莞翊豐精密五金有限公司

圖名(NAME)

HDR 15公8.89 半金 系列RoHS

料號(PART NUMBER) AA03+81X1-X98

圖號(DRAW NUMBER)

圖檔(FILE NAME .DWG)

DIMENSIONS TOLERANCE
METRIC
.0= ±.5
.00= ±.30
.000= ±.20
.0000= ±.
ANG.= ±2°


繪圖(DRAW)

設計(DE'N)

審校(CH'K)

核准(APP'D)

比例(SCALE)	1/1	圖紙(SIZE)	A4	頁次(SHEET)	1	版次(REV.)	B
-----------	-----	----------	----	-----------	---	----------	---

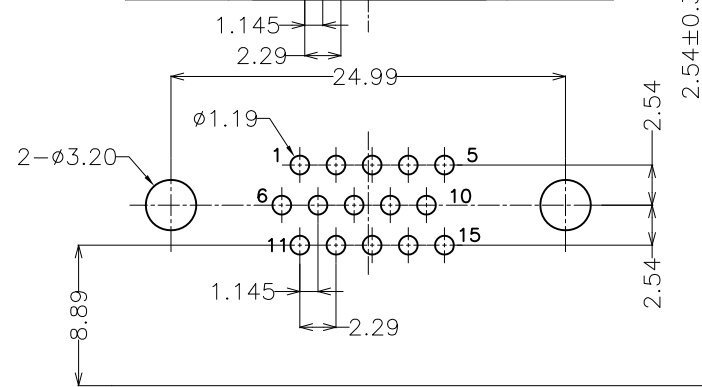

P.C.B. LAYOUT(TOLERANCE±0.05)

TOP VIEW