

REV.	NOTES	DATE
A	RELEASED	2018/05/19




- NOTES:
- MATERIAL:
 - Insulator: PBT+30%Glass Fiber
 - Contact: Brass
 - Contact Plated: Gold Flash/Tin Plated
 - Shell: Steel, Nickel Plated
 - SCREW: BRASS, Nickel Plated
 - SPECIFICATION:
 - Current Rate: 5 Amps
 - Insulator Resistance: 1000MΩ Min. At 500V DC
 - Dielectric Strength: 500V Per minute
 - Operation Temperature: -40°C to +85°C

Color description


PART NO.	COLOR
AA03+30X2-018	BLACK
AA03+30X2-618	BLUE

To prepare:

PART NO.	RIVETING STRUCTUER	SCREW	CONTACT PLATING
AA03+3012-X18	铆合不附螺丝		GOLD/TIN PLATED
AA03+3022-X18	铆合锁螺丝	4.8*11.8	GOLD/TIN PLATED
AA03+3032-X18	叉锁锁螺丝	4.8*11.8	GOLD/TIN PLATED
AA03+3042-X18	铆合附螺丝	4.8*11.8	GOLD/TIN PLATED
AA03+3052-X18	铆合附螺丝	5.8*12.8	GOLD/TIN PLATED
AA03+3062-X18	铆合锁螺丝	5.8*12.8	GOLD/TIN PLATED
AA03+3072-X18	铆合附螺丝	5.8*11.8	GOLD/TIN PLATED
AA03+3082-X18	铆合锁螺丝	5.8*11.8	GOLD/TIN PLATED

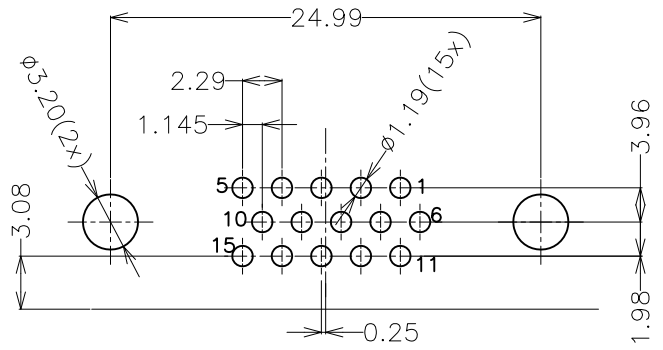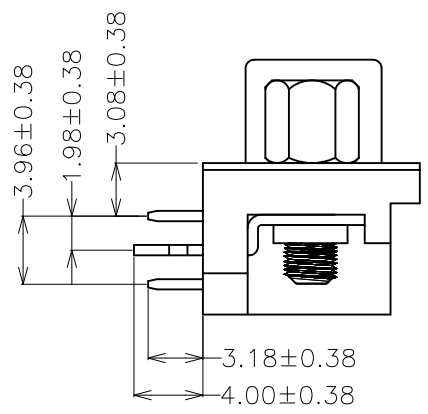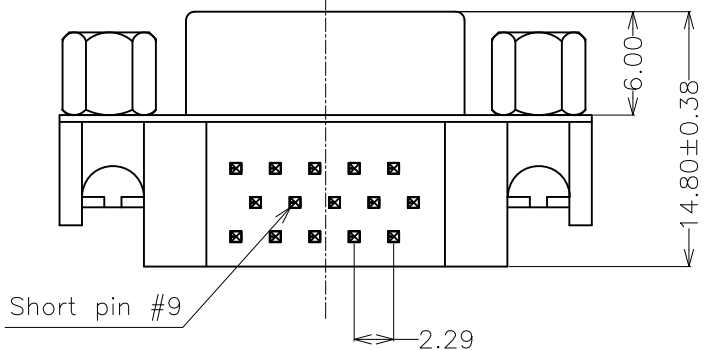

P.C.B. LAYOUT TOP VIEW

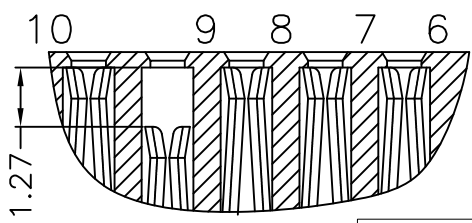

DIMENSIONS TOLERANCE METRIC
 .0 = ±.38
 .00 = ±.25
 .000 = ±.15
 .0000 = ±.
 ANG. = ± 2°

單位(UNITS)	mm
數量(QTY)	N/A
材料(MTL)	SEE NOTE
處理(FINISH)	SEE NOTE
繪圖(DRAW)	
設計(DESIGN)	
審校(CHECK)	
核准(APPROVED)	

東莞翊豐精密五金有限公司

圖名(NAME)
HDR 15母 3.08 半金 系列RoHS

料號(PART NUMBER)	AA03+30X2-X18
圖號(DRAW NUMBER)	
圖檔(FILE NAME .DWG)	

比例(SCALE)	1/1	圖紙(SIZE)	A4	頁次(SHEET)	1/2	版次(REV.)	A
-----------	-----	----------	----	-----------	-----	----------	---