




REV.	NOTES	DATE
01	RELEASED	2019/9/19



3D VIEW

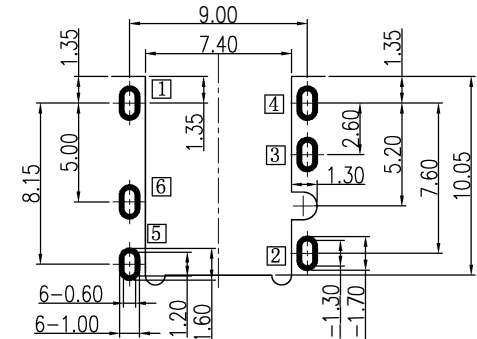





RECOMMENDED P.C.B LAYOUT
TOP VIEW (TOLRANCE:±0.05)

NOTES:

1. MATERIAL: SEE "TABLE 1";
2. FINISH: SEE "TABLE 1";
3. ELECTRICAL:
 - 3.1. VOLTAGE RATING: 12 VAC RMS;
 - 3.2. CURRENT RATING: 0.5 AMP;
 - 3.3. CONTACT RESISTANCE: 50mΩ Max.(Initial), 100mΩ Max.(After Life test);
 - 3.4. INSULATION RESISTANCE: 1000 MΩ Min., 500VDC.(Initial), 100 MΩ Min., 500VDC.(After Humidity test);
 - 3.5. WITHSTAND VOLTAGE: 500 VAC RMS 50(60)Hz, 1 minute;
4. MECHANICAL:
 - 4.1. MATING FORCE: 3.0Kgf MAX.;
 - 4.2. UNMATING FORCE: 0.3Kgf MIN.;
 - 4.3. OPERATING LIFE: 5000 CYCLES MIN.;
5. ENVIRONMENTAL:
 - 5.1. OPERATION: -30°C~+80°C.

TABLE 1:

NO.	PART NAME	QTY	MATERIAL	DESCRIPTION	REMARK
⑨	MYLAR	1	T=0.08mm	BLACK	
⑧	Contact_5	⑤	C5210	Au0.6u"Min	T=0.20mm
⑦	Contact_6	⑥	C5210	Au0.6u"Min	T=0.20mm
⑥	Contact_4	④	C5210	Au0.6u"Min; Tin30u"Min	T=0.20mm
⑤	Contact_3	③	C5210	Au0.6u"Min; Tin30u"Min	T=0.20mm
④	Contact_2	②	C5210	Au0.6u"Min; Tin30u"Min	T=0.20mm
③	Contact_1	①	C5210	Au0.6u"Min; Tin30u"Min	T=0.20mm
②	Separator	1	LCP	Black	
①	Housing	1	PA10T	Black	

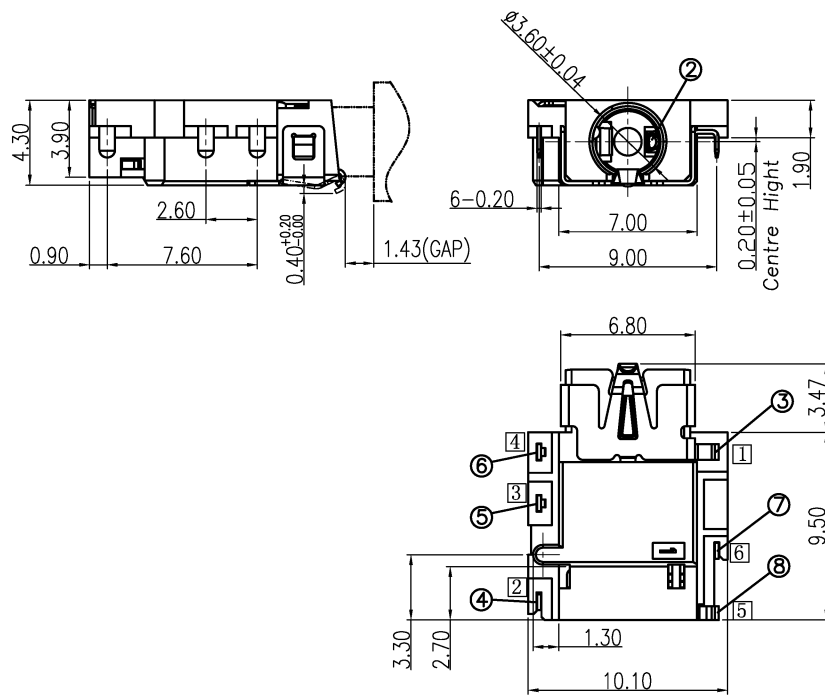

DIMENSIONS TOLERANCE METRIC

X : ±0.5
X.X : ±0.38
X.XX : ±0.25

ANGLES
X : ±1'
X.X : ±0.5'

單位(UNITS)	mm	東莞翊豐精密五金有限公司							
數量(QT'Y)	N/A								
材料(MT'L)	SEE NOTE								
處理(FINISH)	SEE NOTE	圖名(NAME) φ3.5mm Phone Jack 沉板中心0.20MM							
繪圖(DRAW)		料號(PART NUMBER)		AAPJ+3B06M1-01Z					
設計(DE'N)		圖號(DRAW NUMBER)							
審校(CH'K)		圖檔(FILE NAME .DWG)							
核准(APP'D)		比例(SCALE)	1/1	圖紙(SIZE)	A4	頁次(SHEET)	1	版次(REV.)	01